M1

THE AUDIOPHILE NETWORK MUSIC SYSTEM

Too High
Stevie Wonder
DSD 2.822 MHz 1 Bit
8 /14
0:20 /4:39

LUMÏN

| INTEGRATED SYSTEM | 60W 8Ω 100W 4Ω | CLASS D | DSD 128 5.6MHz | PCM 384KHZ | ANALOGUE INPUT ADAPTER |

LUMÏN

M1

LUMÏN

LUMÏN M1

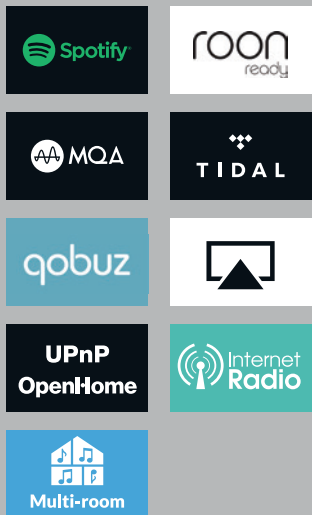COMPACT ONE-BOX INTEGRATED SYSTEM DOESN'T DOMINATE THE ROOM

INTEGRATED CLASS-D POWER AMPLIFICATION RETAINS DIGITAL SIGNAL PATH RIGHT TO THE SPEAKER OUTPUTS

DSD128 5.6MHZ

NATIVE MQA, TIDAL, ROON & QOBUZ

ANALOGUE INPUT VIA INCLUDED ADAPTER

AWARD-WINNING LUMIN CONTROL APP FOR IPAD AND ANDROID TABLETS

STREAMING PROTOCOL:

UPnP AV protocol with audio streaming extension (OpenHome). Roon Ready. Spotify Connect. Apple AirPlay. Songcast. Gapless Playback. On-Device Playlist

SUPPORTED AUDIO FILE FORMATS:

DSD :
DSF (DSD), DFF (DSD), DoP (DSD)
PCM:
FLAC, Apple Lossless (ALAC), WAV, AIFF
OTHER:
MQA, MP3, AAC (in M4A container)

SUPPORTED SAMPLE RATES & BIT DEPTHS:
PCM, 44.1khz–384kHz, 16–32-bit, Stereo
DSD128, 5.6MHz, 1-bit, Stereo

UPSAMPLING RATES & BIT DEPTHS:
PCM 192/176.4kHz and DSD128 upsampling option for all files up to 96kHz

SUPPORTED CONTROL DEVICES:

Apple iOS devices. iOS 8.0 or later required

Android devices. Android 4.0 (Ice Cream Sandwich) or later required

APP FEATURES:

Native support for TIDAL, MQA, Qobuz and TuneIn Radio. Tidal MQA and Qobuz high-res icons to identify high-res music. Multi-room simultaneous playback. Volume control. High-resolution artwork. Artwork caching. Search. Multiple tag handling. Composer tag support. Album-grouping in playlist. Automatic internet links to artists/album/songs. Saving, syncing and restoring of playlists (including Tidal and Qobuz)

FINISH:

Raw brushed aluminium
Black anodised brushed aluminium

INPUT:

Gigabit Ethernet Network (1000BASE-T) RJ45

USB storage, flash drive, USB hard disk (Single-partition FAT32, NTFS, exFAT and EXT2/3)

RCA and 3.5mm mini jack analogue input via included adapter

OUTPUT:

PHYSICAL: Stereo 4 mm banana binding posts
SPEAKER LOAD: >= 4 Ohm
RATED POWER OUTPUT (PER CHANNEL):
60W @ 8 Ohm Speaker
100W @ 4 Ohm Speaker

POWER SUPPLY:

Internal shielded 100–240V AC auto-ranging

OTHER:

Firmware-upgradable for further features and enhancements

LUMIN: 361mm (W), 323mm (D), 58mm (H), 4.5kg